


16. Lift Body By Wheel Well on Left and Right side of Bike
 - a. Lift the body simultaneously on the left and right side.
 - b. Insert blocks of wood between the bottom of the trunk and the frame rails such that the bottom of the trunk is 5"-6" off the frame rail measured directly above the rear shocks.

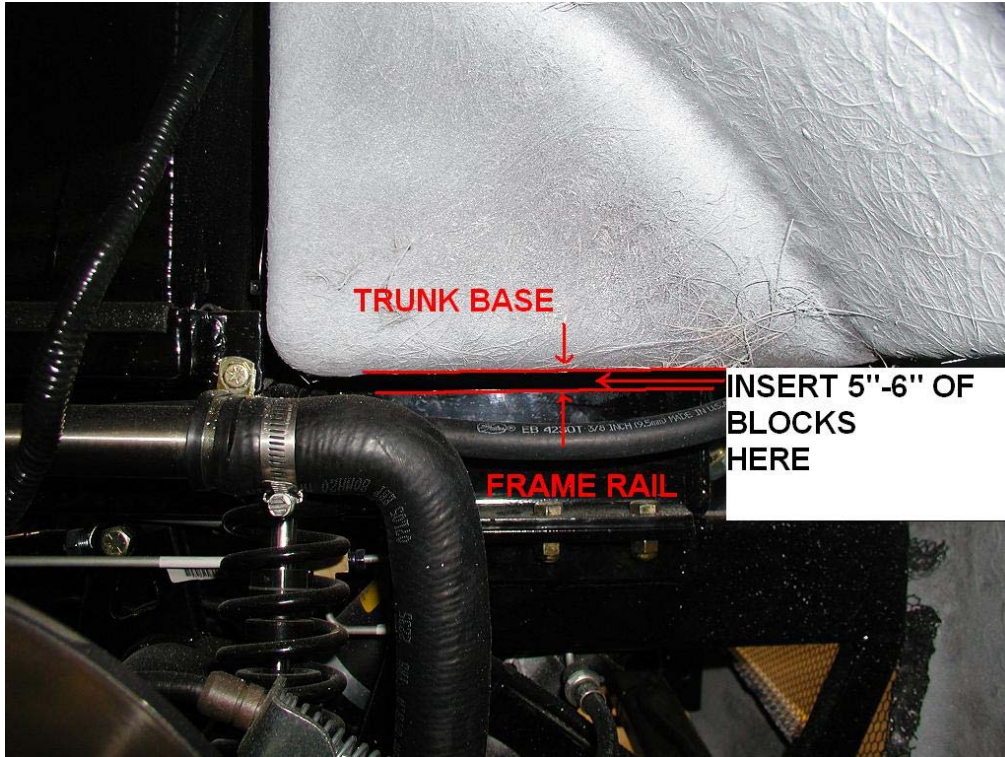

17. Remove Defective Fuel Tank Out Left Side Rear Wheel Well.
18. Insert New Fuel Tank.
19. Install Fuel Lines and Electrical Connector.
 - a. SNAP RED SAFETY TAB TO LOCK IN PLACE
20. Turn on Key and make sure Fuel Gauge is Reading Empty if Tank is Empty.

You want to make sure tank is operational before the body is dropped back down on frame.