


21. Lift body and remove blocks, as body is lowered, MAKE SURE THE RUBBER FUEL NECK HOSE IS INSTALLED ON TANK AND FUEL FILL NECK.

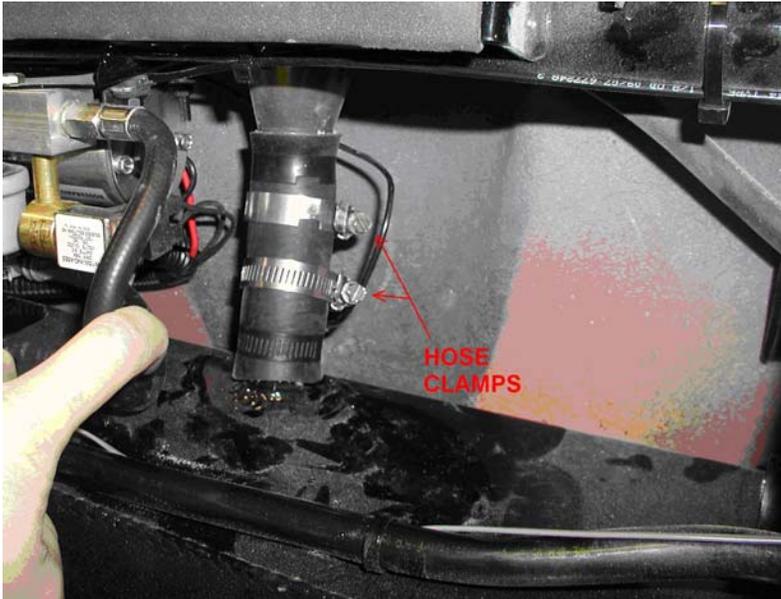

22. Install Fuel Fill Neck Hose Clamps.
23. Fill Unit With Gas
- Check Fuel Fill Neck Hose for Leaks While Filling Unit
 - Check Gas Gauge Operation and Listen for Fuel Pump Activation when Key is Turned to the On Position.
 - Start Engine and Check for Proper Operation Before Proceeding to Install the Body and Other Items.
24. Install Fuel Tank Hold Down Strap.
- Tighten Front Nut
 - Tighten Rear Nut Between Fuel Tank and Trunk Wall
25. Install Roll Bar Bolts
26. Install All Body Mount Bolts.
27. Install Control Panel
28. Install Air Compressor and Junction Block.
29. Turn Key on and Check for Air Compressor Operation and Air Bag Pressure Reading
30. Install Air Duct Louvers
31. Install Trunk Carpet
- Use Headliner Yellow Glue to Adhere Carpet to Trunk Floor
 - Follow Directions on Back of Can for Application
32. Install Rear Wheel Assembly
33. Remove Blocks Holding Vehicle up and Place Vehicle Back on Ground
34. Install Seats
35. Test Drive